

DATA SHEET | ENGLISH



Mechanical data

Material housing	Anodized aluminum / Plastic ABS
Process connection	G1/8" inside
Material process connection	Anodized aluminum
Mounting position	Any (port downwards when using oiled air)
Weight	32 g

Electrical data

Electrical connection	M8x1, 4-pole; M12x1, 4-pole
Operating voltage	10.8...30 VDC (UL: class 2 source only)
Current consumption	< 15 mA / < 3 mA power saving mode
Short-circuit / reverse polarity protection	yes / yes

Output

Output signal	2x PNP (IO-Link is optionally available); 2x NPN (only without IO-Link)
Max. output current	max. 200 mA each output
Output function	NO / NC (programmable)
Operating frequency	200 Hz
Response time	< 2.8 ms
Accuracy (23°C)	± 0.5% FS
max. temperature error	± 1.5% FS (-25°C...85°C)
Repeatability	± 0.2% FS
Long term drift	≤ 0.1% / a

Pressure range



Measuring range (bar)	0...0,25	-1...0	-1...1	-1...3	-1...10	0...10	0...12
(psi)	0...3,26	-14,5...0	-14,5...14,5	-14,5...43,5	-14,5...145	0...145	0...174
max. overpressure*							
(bar)	0,5	2	6	15			
(psi)	7,25	29	87	217,6			

IO-Link

IO-Link specification	Version 1.1
Frame type	2.2
Transmission physics	3-conductor physics (PHY2)
Transmission rate	COM 2 / 38.4 Kbit/s
Process data width	24 bit
Measurement information	16 bit
Switch point information	2 bit
Max. cycle time	5 msec

ELECTRICAL CONNECTION

Pin	Assignment
1	Ub+
3	0 V
4	Out 1 / IO-Link
2	Out 2 / Diagnose

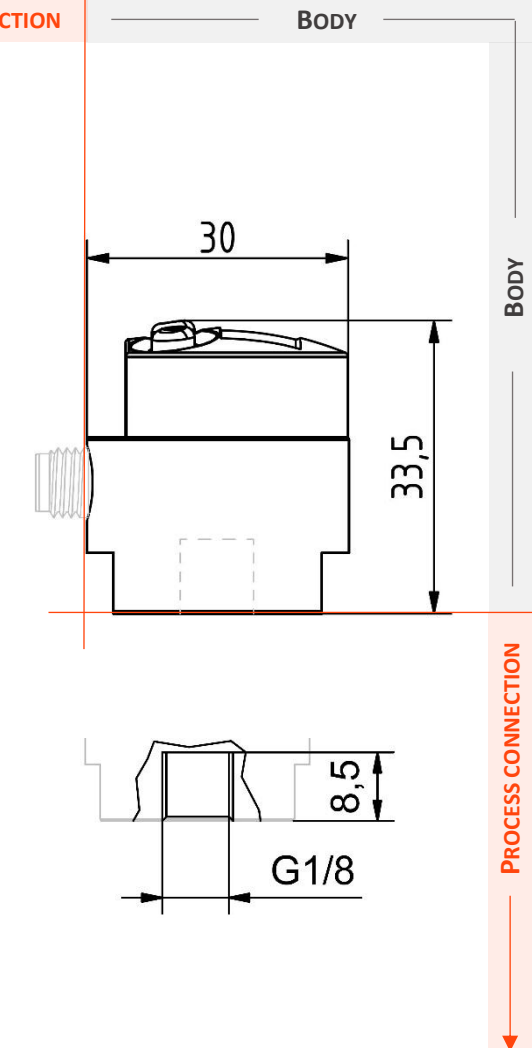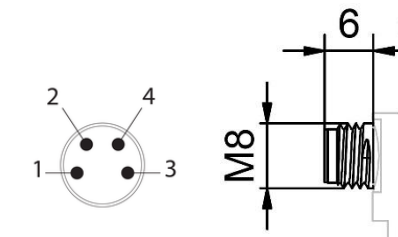

General data

Display	Digital display
Switching status display	1x LED each output
Setting options	Switch points; NO/NC; Hysteresis/Window mode; diagnostic mode; On/Off Delay; Pressure unit
Operating medium	Filtered, dry or oiled air and non-corrosive gases
Protection class	IP65
MTTF (40°C)	319 years

Ordering information

1 - 06 - XX XX - XX 3 X XX	
<u>Process connection</u>	<u>Firmware</u>
G1/8" inside 08	Standard 00
	Customized >00
<u>Electrical Connection</u>	<u>Pressure range</u>
M8 01	bar psi
	-1...0 -14.5...0 1
	-1...1 -14.5...14.5 2
	-1...10 -14.5...145 3
<u>Output signal</u>	
2x PNP 03	0...10 0...145 4
2x NPN on request	0...12 0...174 5
	-1...3 -14.5...43.5 6
	0...0.25 0...3.62 8

Operating conditions

Operating temperature	Operation: -25°...+85°C (UL: 0°...+60°C)
EMC / interference immunity	EN61000-6-2
EMC / interference emission	EN61000-6-4
UL approval	E511277

*overpressure not continuously allowed